

EasyAwn® Installation, Care and Maintenance Manual



EasyAwn, LLC
3575 Trotters Drive, Bldg A
Alpharetta, GA 30004
Toll Free: 877-EasyAwn
<http://www.EasyAwn.com>

READ AND SAVE THESE INSTRUCTIONS! EasyAwn® Dome Awning Installation

Congratulations – You have made an excellent decision in choosing an EasyAwn Do-it-Yourself awning. EasyAwn uses innovative designs and quality materials to make your awning easy to install and ensure a long life.

Please take a minute and become familiar with this entire document BEFORE beginning your installation. This will ensure a quick, trouble-free installation

Basic Tools Needed for Installation

Tape Measure & Pencil

Drill

Drill Bits (Depends on Surface)

Adjustable Wrench

Level (recommended)

Screwdriver

Ladder

General Comments

- Wash your hands before installation and be sure they are clean when handling the fabric.
- Always be careful with the fabric during installation. Drills, screwdrivers and other items can puncture the fabric. This and other customer installation damage is not covered by the warranty.
- A second person to assist in holding the awning up and the fabric back when installing your awning is recommended.
- Take your time when planning to install your new awning. Although simple to install, take your time to ensure a proper installation.

IMPORTANT!


If you need replacement parts or hardware for installation, please do not return your awning to the store or dealer. We will promptly provide these to you at no charge.

Call 877-EasyAwn or 877-327-9296

Planning and Layout of the Installation Location

The first step in installing your EasyAwn™ is to determine where you will mount the awning. It should be installed level and centered over the window or door. **If the door or window opens outward, the awning must be high enough to provide clearance when the door or window is in the open position.** Note: In some cities and counties there are building codes that specify how awnings can be mounted.


Determine where you will be mounting the awning and refer to the figure below for typical locations of studs and headers. The framing members outlined in Gray will provide an appropriate anchoring point for the fasteners.

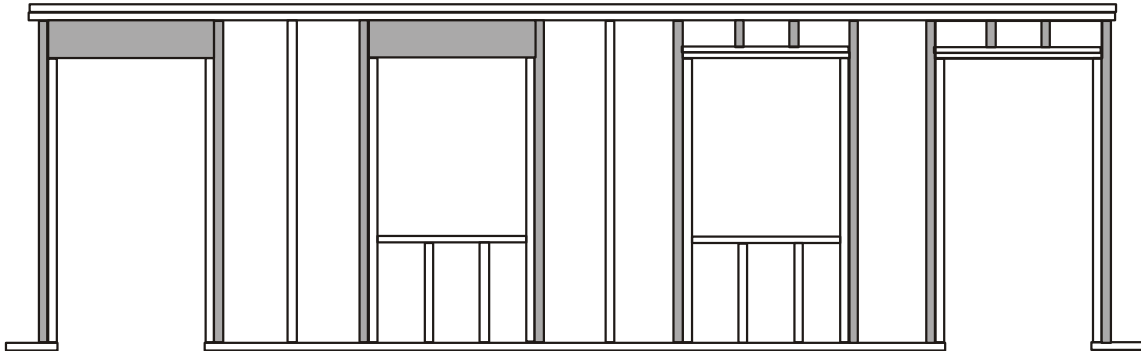

On masonry walls drill and insert anchors for the mounting screws. For other surfaces, locate the studs for anchoring the supplied screws.


- If the locations of the predrilled holes do not match your stud locations, drill new 1/4" holes in the back bar of the frame to match your stud locations.
- If you have planking or another thick surface over the framing, you may need to use longer screws than those supplied to ensure a secure fastening.

Dimensions and List of Parts

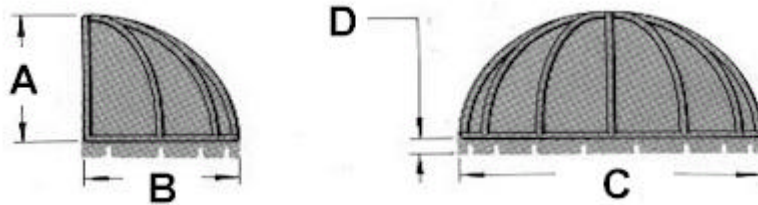

Size	A - Height	B - Projection	C - Width	D - Valance
4'	19	24	4'-0"	6"
5'	23	30	5'-0"	6"
6'	27	36	6'-0"	6"

Become familiar with each part in the following figure before you begin.

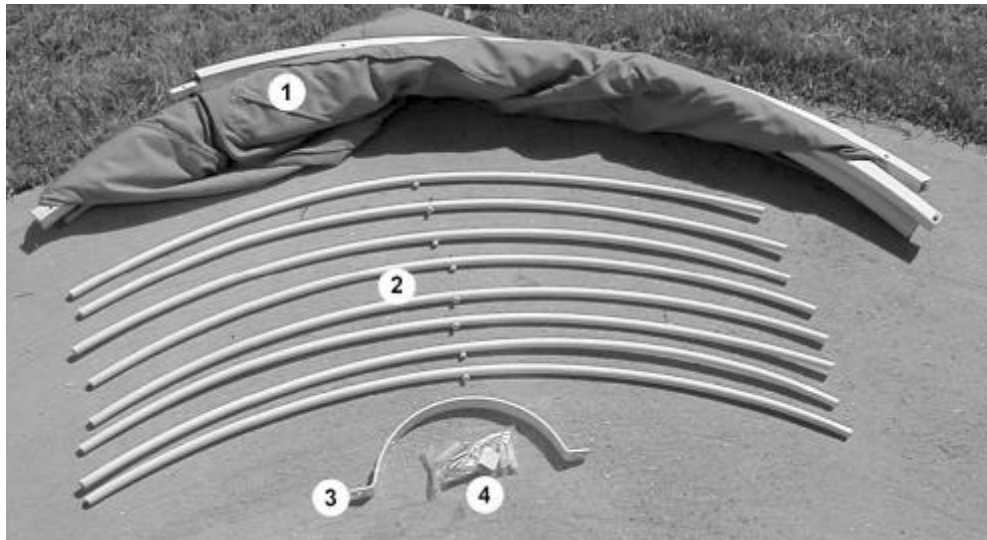


Item	Part Description
1	Dome Awning
2	Rafters or Ribs
3	Crown Ring
4	Hardware

Assembly of the EasyAwn™

Open the dome to a clamshell configuration as shown below.

- Combine the two sections of the front and back bar
- Feed the fabric into the aluminum frame channel while GENTLY pulling on the ends of the fabric in the channel to bring the sections together.
- Secure the sections with one of the small screws in the predrilled holes
 - **DO NOT OVERTIGHTEN AS THE ALUMINUM CAN STRIP.**
- Note the larger bar on top in the figure below; this is the front bar of the awning. The lower bar shown below is the back bar that will be fastened to the wall.

If the fabric comes out of the ends of the channel, simple pull the end of the fabric and feed it back into the channel. When you are done with this step, the awning will look like the figure below:

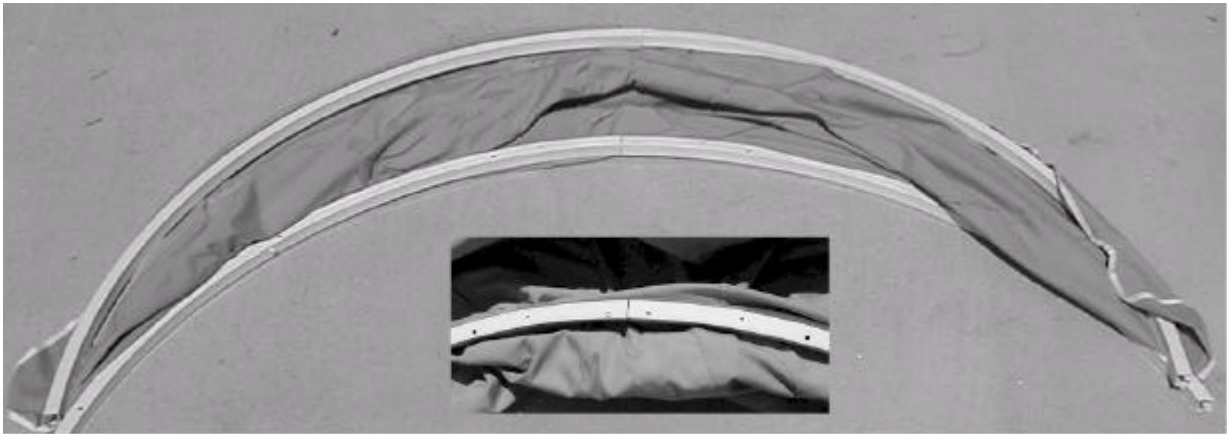

Use the smaller screws to attach the crown ring to the back bar as shown below.



Mount the EasyAwn™ to the Wall

The bracket included in the hardware package is used to hold the awning in place on the wall during installation. This is fastened to the wall at the center of where the awning will be located as shown below.



Place the EasyAwn™ into the bracket as shown below. This may require a second person for larger models. **NOTE: This picture is a final assembly and yours will not have the rafters installed at this point as shown below.**



Fastening to the Wall

Finish fastening the back bar to the wall using the supplied screws in the predrilled holes. You may need to drill new ¼" holes in the back bar as described above.

- **BE CAREFUL TO NOT DAMAGE THE FABRIC**
- **MAKE SURE THE WIDTH OF THE INSTALLED FRAME IS CORRECT AS PROVIDED ABOVE AS DIMENSION "C".**

A second person to lift the front bar and make sure the fabric is back from the drill will make this step easier.

Installing the Ribs

Align the rivet on the end of the front bar so it is inserted into the round channel of the back bar tubing as shown below.



Install the ribs by placing the ends of the rib over the corresponding pegs and rotating the rib into place.

- **Be careful to not push the ends of the ribs against the fabric.**
- **Installing the last rib will be tight. The fabric will loosen slightly if wetted with a hose or allowed to relax overnight without the final rafter installed.**

Start with the center ribs and continue until all are in place. Align the ribs as close as possible with the seams. It is normal for these not to match exactly.

Securing the Ribs

Tie the alignment cord off at one end of the awning at the back bar as shown on the right hand side of the figure below.



Hold each rib in place and wrap the cord 2 to 3 times around each cleat to keep the ribs from moving. Keep tension in the cord during installation. When all the ribs are secured, tie off the cord to the cleat on the other side of the back bar. Your installation is not complete.

Sealing the Awning at the Wall

If you would like a waterproof seal where the awning attaches to the wall, use a non-adhesive caulk to seal any gaps. Do not use a silicone or adhesive caulk, as it will make removing the awning difficult.

Congratulations - Your EasyAwn™ installation is now complete!

We hope that your installation went as smooth and easy as we have designed into the EasyAwn™. We love to hear from our customers and look forward to your feedback at www.EasyAwn.com or Toll Free in the USA at 877-EasyAwn. We are continually improving our manuals and website and value your feedback.

Please send a picture of your new awnings to info@easyawn.com and we will post it to our website.

Care and Maintenance

Keep your EasyAwn™ looking great by hosing off the fabric on a monthly basis. This will help prevent dirt from embedding in the fabric and reduce the need for thorough cleanings. In most environments, a thorough cleaning will be needed every two to three years with the EasyAwn™ fabric on the awning frame or removed for cleaning in your washing machine.

Please visit www.Sunbrella.com or www.EasyAwn.com for more care instructions.

General Care Tips

- **Keep trees and shrubs trimmed back from all canvas awnings**
- **Do not use harsh chemicals or bleaches for cleaning.**
- **Insect repellents and other chemicals can damage the fabric**
- **Do not hang from the awning, it will damage the fabric and the frame**
- **Remove awnings for painting**
- **Snow accumulation can stretch or tear the fabric**
- **Remove awnings during snow conditions**
- **Do not let water pool on the fabric.**

Limited Warranty

If you are installing your EasyAwn™ on a commercial building or in another area restricted by building and zoning regulations, contact your local building officials prior to installing your EasyAwn™ to ensure you will comply with local regulations. Many homeowners associations also require approval prior to making any exterior home improvement and should be consulted prior to installation.

EasyAwn, LLC is committed to customer satisfaction and we offer a reasonable money back guarantee if you are not satisfied with your EasyAwn™. This is limited to awnings returned within 30 days of shipment and must not be damaged. **Happy customers are the best salespeople we have** and we are always fair with our satisfaction guarantee.

EasyAwn, LLC warrants this product against defects in materials and workmanship on a prorated basis for a period of three years from the date of original purchase. EasyAwn, LLC agrees to either repair the product or replace it, at the sole discretion of EasyAwn, LLC. This warranty does not include any costs associated with the physical installation, removal or return of this product.

Only the original purchaser of this product is extended this warranty. No warranty work will be provided under this warranty without the purchaser's receipt or other proof of the date of purchase.

EasyAwn, LLC's warranty covers product failure due to defects in material or workmanship only. It does not cover corrosion or discoloration, or product failure due to misuses, abuse, faulty installation, alteration, lack of reasonable care, or any other failure not related to defects in materials or workmanship.

There are no other warranties except those stated above.

EasyAwn, LLC shall not be liable for incidental, special or consequential damage resulting from the use of the product or arising out of any breach of this warranty. All implied warranties, if any, including implied warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this express warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions or limitations may not apply to you. No other warranty, written or verbal, will be honored for this product. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state.

EasyAwn, LLC is not responsible for damage of merchandise in transit. Repaired or replaced products shall be subject to the terms of this warranty and are inspected prior to return shipment. Damages that are incurred during transit should be reported at once to the carrier and a claim should be filed with them.

For assistance with this product or to obtain warranty services, call EasyAwn, LLC's Customer Service Department 8:00 – 5:00 Eastern Standard Time toll free at 877-EasyAwn. Please have the product's model number and date of purchase when you call to avoid delays.

We appreciate your purchase of this EasyAwn™. We have made every effort to supply a high quality product that insures trouble free service for many years. Please contact us if you have any questions, concerns or if we can be of help in any way.

EasyAwn, LLC
Toll Free: 877-EasyAwn
www.EasyAwn.com
Email: info@easyawn.com